



PMA 165/182/192



PICOQUANT

Photomultiplier Detector Assembly

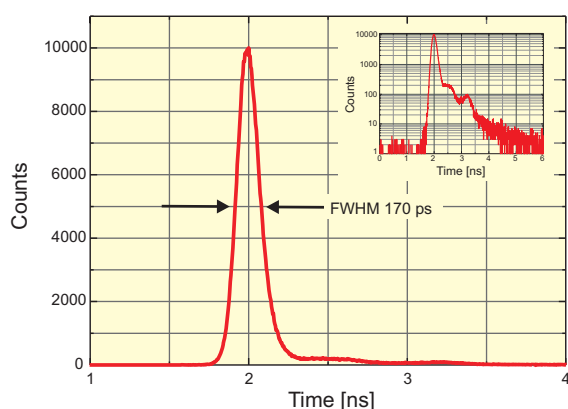

- Instrument response < 200 ps (FWHM)
- Internal GHz pre-amplifier & shutter
- Optional thermo-electric cooling
- Simple 12 V DC power supply, no HV supply required
- Spectral ranges from 185 to 900 nm
- RF and magnetic shielding with gold plated iron or nickel coated aluminum housing



Applications

- Steady-state and time-resolved fluorescence and luminescence spectroscopy
- Ultra sensitive analysis
- Fluorescence microscopy
- General purpose photon counting and low light level detection

Photomultiplier Detector Assembly

The PMA detector is a single photon sensitive, fully integrated, fast time response and low noise photon sensor from PicoQuant. The PMA integrates a fast Photomultiplier Tube (PMT), a high voltage power supply and pre-amplifier. For selected models thermo-electric cooling and automatic overload protection are available as an option.


These devices are built in a gold plated iron or nickel coated aluminum housing to achieve high level of RF and magnetic shielding and protection against the interference with other devices. The built-in pre-amplifier is specially targeted at timing sensitive applications such as Time-Correlated Single Photon Counting (TCSPC). The PMA Series is available in a positive or negative polarity output to fit various timing electronics.

Various photocathodes can be incorporated into the PMA to meet user's needs. Three different cathode versions are available. A blue sensitive, low dark count version covers the spectral range from 185 nm to 650 nm. The standard unit is sensitive in the range from 185 nm to 820 nm and an extended red sensitive cathode covers the 300 nm to 900 nm range. A thermo-electrically cooled housing is available to reduce the dark count rate (recommended for red sensitive versions).


The housing is available in three different versions. The OEM design contains no safety shutter. Standard PMA-M features a security shutter, which can be interlocked with e.g. a sample chamber lid. Cooled versions (PMA-C Series) incorporate in addition an automatic overload detection function that closes the shutter in case of over-illumination.

Signal output for all models is a standard 50 Ohms SMA connector. The module only needs a 12 V DC supply line, which is delivered already with the PMA unit.

Spectral response

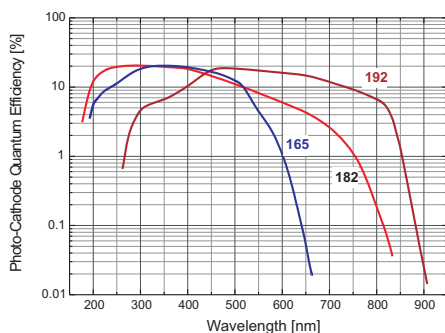

Naming

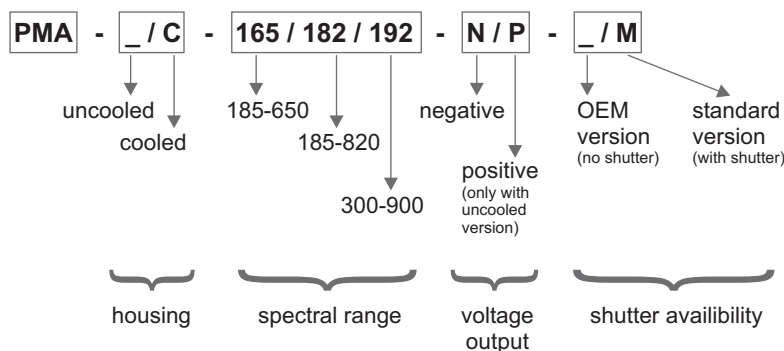

Specifications

Electrical Parameters	PMA 165	PMA 182	PMA 192
Wavelength range	185 - 650 nm	185 - 820 nm	300 - 900 nm
Dark counts* (uncooled)	< 50 cps	< 900 cps	< 6000 cps
Dark counts* (cooled)	---	< 150 cps	< 900 cps
Transit time spread (FWHM, typ. value)		200 ps	
Recommended max. count rate		5 MHz	
Single electron response width		1.5 ns	
Pulse rise / fall time		750 ps	
Signal Output			
Connector	SMA female		
Impedance	50 Ohms		
Polarity	negative or positive		
Power Supply			
Input	12 V DC		
Max. current consumption (uncooled)	200 mA		
Max. current consumption (cooled)	450 mA		
Dimensions			
	OEM version	PMA versions	
Uncooled (w × d × h)	134 × 84 × 34 mm	72 × 84 × 83 mm	
Cooled (w × d × h)	---	120 × 84 × 110 mm	
Detector area diameter	8 mm		

* typ. value, at 20°C ambient temperature

Please check our website for updated information.

All Information given here is reliable to our best knowledge. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications and external appearances are subject to change without notice. Trademarks or corporate names are used for explanation and identification, to the owner's benefit and without intent to infringe.

© PicoQuant GmbH, December 2011



PicoQuant GmbH
Rudower Chaussee 29 (IGZ)
12489 Berlin
Germany

Phone +49-(0)30-6392-6929
Telefax +49-(0)30-6392-6561
Email info@picoquant.com
WWW http://www.picoquant.com